




# 26 JOHNSON 40



|             |         |          |           |
|-------------|---------|----------|-----------|
| DISTANCE:   | 40 FEET | VOLUME:  | 34.955 mL |
| RATIO:      | 2.57:1  | FORWARD: | 16.695 mL |
| DROP BRUSH: | 36 FEET | REVERSE: | 18.26 mL  |
| TANKS:      | GLIDE   | PUMP:    | MULTI     |

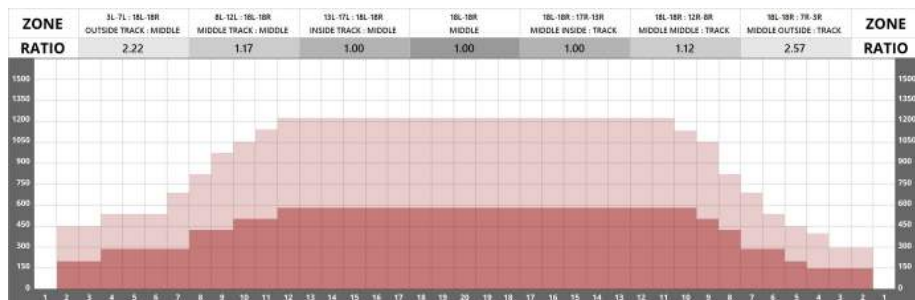

## FORWARD LOADS DATA

| # | START | STOP | LOADS | MICS | SPEED | BUFF | TANK      | DISTANCE | T.OIL |
|---|-------|------|-------|------|-------|------|-----------|----------|-------|
| 1 | 2L    | 2R   | 3     | 50   | 14    | 500  | A - GLIDE | 0 → 4    | 5,550 |
| 2 | 2L    | 5R   | 1     | 50   | 14    | 500  | A - GLIDE | 4 → 6    | 1,700 |
| 3 | 4L    | 6R   | 2     | 45   | 14    | 500  | A - GLIDE | 6 → 10   | 2,790 |
| 4 | 8L    | 8R   | 3     | 45   | 18    | 500  | A - GLIDE | 10 → 17  | 3,375 |
| 5 | 10L   | 9R   | 2     | 40   | 18    | 500  | A - GLIDE | 17 → 22  | 1,760 |
| 6 | 12L   | 10R  | 2     | 40   | 18    | 500  | A - GLIDE | 22 → 27  | 1,520 |
| 7 | 2L    | 2R   | 0     | 40   | 18    | 500  | A - GLIDE | 27 → 32  | 0     |
| 8 | 2L    | 2R   | 0     | 40   | 22    | 500  | A - GLIDE | 32 → 36  | 0     |
| 9 | 2L    | 2R   | 0     | 40   | 30    | 500  | A - GLIDE | 36 → 40  | 0     |


## REVERSE LOADS DATA

| # | START | STOP | LOADS | MICS | SPEED | BUFF | TANK      | DISTANCE | T.OIL |
|---|-------|------|-------|------|-------|------|-----------|----------|-------|
| 1 | 2L    | 2R   | 0     | 45   | 26    | 200  | A - GLIDE | 36 → 34  | 0     |
| 2 | 11L   | 11R  | 2     | 45   | 22    | 500  | A - GLIDE | 34 → 28  | 1,710 |
| 3 | 9L    | 9R   | 3     | 50   | 18    | 500  | A - GLIDE | 28 → 20  | 3,450 |
| 4 | 7L    | 7R   | 1     | 50   | 18    | 500  | A - GLIDE | 20 → 18  | 1,350 |
| 5 | 2L    | 2R   | 1     | 50   | 14    | 500  | A - GLIDE | 18 → 16  | 1,850 |
| 6 | 7L    | 7R   | 2     | 50   | 14    | 500  | A - GLIDE | 16 → 12  | 2,700 |
| 7 | 2L    | 4R   | 2     | 50   | 14    | 500  | A - GLIDE | 12 → 8   | 3,500 |
| 8 | 2L    | 2R   | 2     | 50   | 14    | 500  | A - GLIDE | 8 → 4    | 3,700 |
| 9 | 2L    | 2R   | 0     | 50   | 14    | 500  | A - GLIDE | 4 → 0    | 0     |

## THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | REVERSE DROP BRUSH  
This pattern may require adjustments if using a lane machine that does not have these features

Created Jan 15, 2026 - Rendered for Atlas Pro.

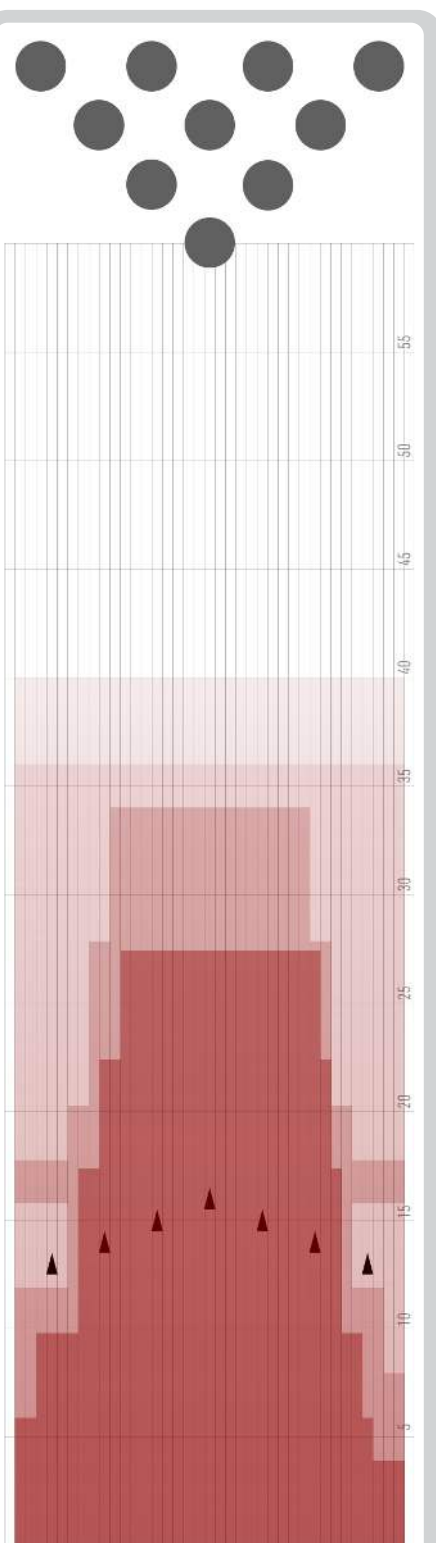

SCAN QR CODE FOR  
MORE PATTERNS ON  
KEGEL PATTERN  
LIBRARY



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET